

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 371 799 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
20.03.1996 Bulletin 1996/12

(51) Int Cl.⁶: G11B 7/09, G11B 7/085,
G11B 7/095, H01F 1/113

(21) Application number: 89312482.6

(22) Date of filing: 30.11.1989

(54) Objective lens driving apparatus with a viscoelastic substance

Gerät zum Bewegen einer Objectivlinse mit einer viskoelastischen Substanz

Appareil entraînant une lentille d'objectif utilisant une substance viscoélastique

(84) Designated Contracting States:
DE

(30) Priority: 01.12.1988 JP 302203/88

(43) Date of publication of application:
06.06.1990 Bulletin 1990/23

(73) Proprietor: KABUSHIKI KAISHA TOSHIBA
Kawasaki-shi, Kanagawa-ken 210, Tokyo (JP)

(72) Inventors:

- Kasahara, Akihito
Intellectual Property Division
Minato-ku Tokyo 105 (JP)
- Yamada, Akira
c/o Intellectual Property Division
Minato-ku Tokyo 105 (JP)

- Yoshizawa, Takashi
Intellectual Property Division
Minato-ku Tokyo 105 (JP)
- Wada, Katsutoshi
Intellectual Property Division
Minato-ku Tokyo 105 (JP)
- Yamasaki, Hideo
c/o Intellectual Property Division
Minato-ku Tokyo 105 (JP)

(74) Representative: Freed, Arthur Woolf et al
MARKS & CLERK,
57-60 Lincoln's Inn Fields
London WC2A 3LS (GB)

(56) References cited:
WO-A-89/04821 DE-A- 3 627 451
GB-A- 1 550 895 JP-A-58 009 224

- SOVIET INVENTIONS ILLUSTRATED, Sections
P, Q, week 8643, December 3, 1986 DERWENT
PUBLICATIONS LTD. London, Q 49

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

The present invention relates to an objective lens driving apparatus used in an optical disk apparatus provided with a viscoelastic substance.

Optical disk apparatuses, for use as optical information processing apparatuses, are characterized by their information storage capacities much greater than those of conventional magnetic recording apparatuses, and are presently used in various fields of application. Principally, these optical disk apparatuses have modern technical problems that they should be able to access desired information quickly and accurately, and to offer the information to users without delay.

In order to accurately access recorded information on an optical disk with speed, an objective lens for accurately applying a light beam from a light source, such as a semiconductor laser, to a predetermined position on the disk must first be quickly driven in the focusing or tracking direction of the disk. Many technical improvements have already been made on electromagnetic drive elements (e.g., voice-coil motor formed of a coil and a magnetic circuit) for driving the objective lens, so that the lens can enjoy a sufficient driving force.

On the other hand, the objective lens, which can be moved by means of such a sufficient driving force, must be positioned (or stopped) quickly and accurately at a predetermined position. This is a second requirement for the quick and accurate access to the information on the optical disk. More specifically, fine residual vibrations produced in the objective lens must be removed for the quick and accurate positioning of the lens. As regards this requirement, however, there still is much room for improvement, and various investigations are presently being made on the removal of fine vibrations.

According to one of conventional methods for removing fine vibrations of the objective lens, a magnetic fluid is interposed between a coil on the movable side and a magnetic circuit on the fixed side. Such an arrangement is disclosed in Japanese Patent Application Publication No. 58-9224 which is considered to represent the closest prior art.

In this arrangement, the viscosity resistance of the magnetic fluid accelerates a damping effect between movable and fixed parts, so that fine vibrations of the movable part can be absorbed at once. Due to the influence of a magnetic field generated by the magnetic circuit, moreover, the magnetic fluid can stay in magnetic gaps, so that the damping effect can be maintained for a long period of time.

Using the magnetic fluid, however, a conventional objective lens driving apparatus has the following problems. Since the magnetic fluid has a very great surface tension, it will gradually escape from the magnetic gaps if the gaps are relatively long. Moreover, the fluid may possibly evaporate or scatter during the operation of the optical disk apparatus. During prolonged use, therefore, the magnetic fluid is also likely to escape gradually from the magnetic gaps. Such an escape of the magnetic fluid is also attributable to a relatively small magnetic force of the magnetic circuit which is designed for the drive of the objective lens.

Thus, with use of the magnetic fluid, a prolonged, steady vibration damping effect cannot be expected. Since the viscosity of the magnetic fluid greatly changes depending on a temperature change, furthermore, the vibration damping effect also changes. It is therefore difficult to use the magnetic fluid within a practical range of working temperature (-15 to +60°C). Thus, the objective lens driving apparatus cannot easily effect control for the quick and accurate access to the target information.

The use of ferromagnetic viscoelastic material to reduce vibration between pipes in oil wells is known from SU 1216-327.

A dynamic absorber device which includes a viscoelastic link element for absorbing vibration in disk drives is disclosed in GB-A-2179421.

A support for a lens assembly having flexible wire elements to prevent the assembly tilting during tracking and focusing is described in WO-A-8804821.

The present invention has been contrived in consideration of these circumstances, and its object is to provide a viscoelastic substance and an objective lens driving apparatus which facilitates control for a quick and accurate access to target information.

In order to achieve the above object, according to the present invention, there is provided a magnetic driving apparatus which comprises: a fixed portion; movable portion movable relatively to the fixed portion; magnetic field forming means for applying a magnetic field to the movable portion so as to control the movement of the movable portion; and vibration absorbing means arranged between the movable portion and the fixed portion, for absorbing vibration of the movable portion, said absorbing means being a viscoelastic substance arranged in the magnetic field and having magnetic material dispersed in the substance; characterized in that said substance is a gel.

According to the objective lens driving apparatus constructed in this manner, the use of the viscoelastic substance not only produces a great damping effect, but also leads to an improvement in hysteretic characteristic or the relationship between force and displacement. Thus, a prolonged, steady vibration damping effect can be expected, and control for a quick and accurate access to target information is facilitated.

This invention can be more fully understood from the following detailed description when taken in conjunction with

the accompanying drawings, in which:

Figs. 1 to 6B show an objective lens driving apparatus according to a first embodiment of the present invention, in which Fig. 1 is a plan view of the apparatus, Fig. 2 is a sectional view taken along line A-A of Fig. 1, Fig. 3 is a perspective view of the apparatus, Fig. 4A is a diagrammatic view showing a viscoelastic substance in a normal state, Fig. 4B is a diagrammatic view showing the viscoelastic substance in vibration, Fig. 5A is a diagram showing a hysteresis characteristic of a viscoelastic substance containing no magnetic particles, with respect to a tracking direction, Fig. 5B is a diagram showing a hysteresis characteristic of a viscoelastic substance containing magnetic particles, with respect to the tracking direction, Fig. 6A is a diagram showing a hysteresis characteristic of the viscoelastic substance containing no magnetic particles, with respect to the focusing direction, and Fig. 6B is a diagram showing a hysteresis characteristic of the viscoelastic substance containing the magnetic particles, with respect to the focusing direction;

Figs. 7 to 9 show an objective lens driving apparatus according to a second embodiment of the invention, in which Fig. 7 is an exploded perspective view of the apparatus, Fig. 8 is a plan view of the apparatus, and Fig. 9 is a sectional view taken along line B-B of Fig. 8;

Fig. 10 is a perspective view of an objective lens driving apparatus according to a third embodiment of the invention; and

Fig. 11 is a perspective view of an objective lens driving apparatus according to a fourth embodiment of the invention.

Preferred embodiments of the present invention will now be described with reference to the accompanying drawings.

Figs. 1 to 3 show an objective lens driving apparatus according to a first embodiment of the present invention. The driving apparatus comprises objective lens 1, through which a light beam from a light source (not shown) is applied to optical disk D, thereby recording on or reproducing information from the disk. Lens 1, which is fixed to movable member 2, is located at a predetermined distance from center M of inertia of member 2. Elastic hinge 3, which is disposed on center M of movable member 2, has an axis of rotation parallel to the optical axis of objective lens 1. Movable portion 4 of hinge 3 is fixed to movable member 2 by press fit or adhesive bonding. Proximal portion 5 of hinge 3 is supported on fixed member 7 by means of two pairs of leaf springs 6a and 6b, which extend substantially at right angles to the optical axis of lens 1. Fixed member 7 is set upright on base 8, which is formed of a magnetic material.

Thus, objective lens 1 is supported so as to be rotatable together with movable member 2, for a predetermined angle around center M of inertia, by the action of hinge 3, and movable along the optical axis of lens 1 by elastic deformation of leaf springs 6a and 6b. Base 8 is supported so as to be movable in the radial direction of disk D by means of guide rails (not shown) or the like.

Focusing coils 9a and 9b are fixed to those portions of movable member 2 symmetrical with respect to center M of inertia. Likewise, two pairs of tracking coils 10a and 10b are fixed to member 2 so as to be symmetrical with respect to center M. Each of focusing coils 9a and 9b is wound around an axis parallel to the optical axis of objective lens 1, i.e., Y-axis. Tracking coils 10a and 10b, which are wound around the X-axis perpendicular to the Y-axis, are arranged outside focusing coils 9a and 9b.

A pair of inner yokes 11a and 11b, which are set up on base 8, are inserted in focusing coils 9a and 9b, respectively, with predetermined gaps (magnetic gaps) between them. Further, a pair of outer yokes 12a and 12b are set up on base 8 so as to be located on either side of movable member 2. Outer yoke 12a and inner yoke 11a face each other with coils 9a and 10a and a predetermined gap between them. Likewise, outer yoke 12b and inner yoke 11b face each other with coils 9b and 10b and a predetermined gap between them. Permanent magnets 13a and 13b are fixed to those surfaces of outer yokes 12a and 12b which face inner yokes 11a and 11b, respectively. Each magnet is magnetized in the longitudinal direction of the magnetic gap between its corresponding outer yoke 12a or 12b and tracking coils 10a or 10b. Thus, inner yokes 11a and 11b, outer yokes 12a and 12b, permanent magnets 13a and 13b, and base 8 constitute a magnetic circuit.

Viscoelastic substances 14a are arranged individually in the gaps between permanent magnet 13a and tracking coils 10a and between focusing coil 9a and inner yoke 11a. Likewise, viscoelastic substances 14b are arranged individually in the gaps between magnet 13b and coils 10b and between inner yoke 11b and coil 9b. Substances 14a and 14b are formed of a gel, for example. In this embodiment, a gel containing silicone is used for the viscoelastic substances. For example, the material may be YE5818 or YSE3051 produced by Toshiba Silicone Co., Ltd. or SE1890 produced by Toray Silicone Co., Ltd. Magnetic particles 15, such as ferrite particles or barium ferrite particles, are dispersed in viscoelastic substances 14a and 14b. It is to be understood that any other materials than the aforesaid ones may be used for the viscoelastic substances and magnetic particles 15.

According to the objective lens driving apparatus constructed in this manner, movable member 2 is moved in the Y-direction by electromagnetic force generated by energizing focusing coils 9a and 9b. Thereupon, objective lens 1 can be subjected to focusing control.

By electromagnetic force generated by energizing tracking coils 10a and 10b, movable member 2 is rotated around

Y-axis. Thereupon, objective lens 1 can be subjected to tracking control. By positioning lens 1 in this manner, a target information track of optical disk D can be accessed.

The magnetic gaps between the permanent magnet and the tracking coils and between the focusing coil and the inner yoke are filled up with viscoelastic substances 14a or 14b. The damping effect of these viscoelastic substances, for use as a damping material, is greater than that of a magnetic fluid. The use of viscoelastic substances 14a and 14b, moreover, produces a unique effect such that it improves the hysteretic characteristic (relationship between driving force and displacement) which conventionally is deteriorated as the damping effect is improved. This effect is not limited to the application of the present embodiment, and may also be obtained in the case where the viscoelastic substances are arranged between objects which are relatively displaced in places subjected to magnetism, or where the viscoelastic substances are magnetized before they are arranged between objects which are relatively displaced.

Viscoelastic substances 14a and 14b have such a peculiar characteristic for the following reasons. In a normal state (or when no external force is applied), as shown in the diagrammatic view of Fig. 4A, the positional relationships between magnetic particles 15 in the viscoelastic substances are kept stable. In case of vibration (or when external force F is applied), as shown in Fig. 4B, the viscoelastic substances are deformed, so that the stable positional relationships between magnetic particles 15 are broken. The viscoelastic substances are subjected not only to a restoring force attributable to their elasticity, but also to a restoring force attributable to the magnetic attraction between dispersed magnetic particles 15. Thus, a force is generated in a direction such that the state of Fig. 4A is restored and there is no vibration. Since magnetic particles 15 are coupled to their adjacent molecules of the viscoelastic substances, moreover, their relative positions cannot be shifted. Even though the external force acts on viscoelastic substances 14a and 14b, thereby producing vibration therein, in this manner, the magnetic attraction produces the restoring force to quickly restore the stable state, so that hysteresis can be effectively restrained. Figs. 5A and 6A show experimental results of hysteretic characteristic comparison obtained with use of viscoelastic substances having no magnetic particles 15 therein, while Figs. 5B and 6B show results obtained with use of viscoelastic substances having magnetic particles 15 dispersed therein. Figs. 5A and 5B show a case in which movable member 2 is moved in the tracking direction, while Figs. 6A and 6B show a case in which member 2 is moved in the focusing direction. The curves shown in these four drawings represent the relationships between driving current (mA) and displacement (mm). A testing apparatus used is quite similar to the objective lens driving apparatus shown in Figs. 1 to 3. Table 1 shows testing conditions.

Table 1

Viscoelastic Substances :	YE5818 (Toshiba Silicone Co., Ltd.)
Magnetic Particles:	Barium ferrite
Rate of Dispersion of Magnetic Particles:	1 % by weight
Room Temperature:	23°C
Humidity:	35 %

The difference in displacement at 0 mA between the hysteresis curves of Fig. 5A is 41 μ m, and that between the curves of Fig. 5B is 33 μ m. Thus, comparison between Figs. 5A and 5B indicates that the hysteresis is eased by the use of viscoelastic substances 14a and 14b. Further, the difference in displacement at 0 mA between the hysteresis curves of Fig. 6A is 147 μ m, and that between the curves of Fig. 6B is 102 μ m. Also in this case, comparison between Figs. 6A and 6B indicates a remarkable effect of the use of viscoelastic substances 14a and 14b. This unique effect can be detected despite changes of the various testing conditions, including the kind and dispersion ratio of the materials.

The magnetic gaps between permanent magnets 13a and 13b and tracking coils 10a and 10b and between focusing coils 9a and 9b and inner yokes 11a and 11b are too wide to securely hold conventional magnetic fluids, so that comparison related to use of the magnetic fluids in the same apparatus cannot be made. In general, however, a magnetic fluid cannot produce so great a damping effect as that of the viscoelastic substances. Thus, there is a great difference between the effects of the magnetic fluid and the viscoelastic substances.

Such a novel property of viscoelastic substances 14a and 14b can minimize fine vibrations, such as sympathetic vibrations, produced in movable member 2 of the objective lens driving apparatus. Since objective lens 1 can be positioned in an instant, moreover, the time for the access to the target information on the optical disk is reduced, thus ensuring high-speed, high-accuracy control.

As mentioned before, the viscoelastic substances are located in the magnetic gaps. Thus, those regions which conventionally are magnetic gaps or voids can be replaced with the viscoelastic substances. Since magnetic particles 15 are dispersed in the viscoelastic substances, furthermore, magnetic flux passes through particles 15 without passing through air which has a great magnetic reluctance. Even though the length of the magnetic gaps is increased, therefore, the magnetic flux of the magnetic circuit can be effectively utilized. As the magnetic flux crossing the coils increases, the driving force of movable member 2 can be increased. Since viscoelastic substances 14a and 14b and magnetic particles 15 are electrically nonconductive, and therefore, are electrically insulated, they can be brought into contact

with the coils without any trouble. Although the viscoelastic substances are disposed between the coils and the magnetic circuit, they may alternatively be disposed, with the same result, between objects which are relatively displaced in places subjected to magnetism, as mentioned before. Alternatively, moreover, the viscoelastic substances may be magnetized before they are arranged between objects which are relatively movable. In this case, the viscoelastic substances can produce the aforesaid effects without being located in any places which are subjected to magnetism.

[illegible]

Trucking coils 28, which are each wound in the form of a rectangular frame, are fixed individually to the two remaining sides of movable member 22. Each coil 28 is wound around an axis perpendicular to the optical axis of objective lens unit 21. Permanent magnets 29a and 29b are opposed to straight portions 28a and 28b, respectively, of each coil 28 through which electric current flows in the Y-direction. Magnets 29a and 29b are magnetized in opposite directions, and are fixed to yoke 30.

Focusing coil 31 is embedded in intermediate frame 24 by injection molding or the like. Coil 31 is wound in the form of a rectangular frame around the optical axis of objective lens unit 21 so that electric current flows in the X-direction perpendicular to the optical axis. Movable member 22, tracking coils 28, permanent magnets 29a and 29b, and yokes 30 are arranged inside focusing coil 31. Permanent magnets 32 are opposed individually to the outer side faces of coil 30. Yokes 30 and 33 are fixed to pedestal 34, which is fixedly mounted on sub-chassis 27.

Further, mirror 35 is fixed on sub-chassis 35. A laser beam emitted from a light source, such as a laser diode (not shown), is passed through the respective hollows of fixed frame 26 and pedestal 34, and is reflected by mirror 35 to be delivered to objective lens unit 21.

Sleeve 36 is fixed to an end portion of sub-chassis 27 and slidably fitted on a guide shaft (not shown). Sub-chassis 27 is guided by the guide shaft to trace the track on optical disk D.

The gaps between tracking coils 28 and permanent magnets 29a and 29b and between recording coils 30 and permanent magnets 32 are each filled up with viscoelastic substance 14 which contains magnetic particles.

The following is a description of the second embodiment with the aforementioned features. In an optical disk apparatus incorporating the objective lens driving apparatus, optical disk D is rotated by means of a motor (not shown), and sub-chassis 27 is moved in the direction perpendicular to the drawing plane of Fig. 9, thereby effecting playback operation. The light from the light source 1 is reflected by mirror 35, and is transmitted through

The laser beam emitted from the laser diode in the optical system is reflected by mirror 35, and is transmitted through objective lens unit 21 to be applied to a recording surface of optical disk D. A reflection of the laser beam from the recording surface is returned to an original path by mirror 35, and is detected by a photodiode in the optical system. The detected light is subjected to photoelectric conversion so that digital information recorded on the recording surface of disk D can be read.

In the playback operation described above, an error in the condition of application of the laser beam, compared with an ideal condition, is detected by processing the light detected by means of the photodiode. A resulting error detection signal is transmitted to focusing coil 31 and tracking coils 28 by means of a coil driver circuit. When electric current flows in the X-direction through focusing coil 31, intermediate frame 24 is driven in the Y-direction by an electromagnetic force produced between this current and magnetic fields directed from permanent magnets 32 to yokes 33. Accordingly, the laser beam radiated from objective lens unit 21 is corrected so that its spot is always focused on the recording surface of optical disk D. When current flows in the X-direction through straight portions 28a and 28b of tracking coils 28, movable member 22 is driven in the X-direction by an electromagnetic force produced between this current and magnetic fields formed by permanent magnets 29a and 29b to yokes 30. By this operation, the laser beam spot is corrected so as to track the track on the recording surface of disk D with accuracy.

According to the present embodiment, the damping effect of viscoelastic

In the objective lens driving apparatus according to the present embodiment, the damping effect of viscoelastic substance 14, for use as a damping material, is greater not only than that of a magnetic fluid but also than that of a conventional viscoelastic substance. The use of viscoelastic substance 14, moreover, produces a unique effect such that it improves the hysteretic characteristic which conventionally is deteriorated as the damping effect is improved.

Such a novel property of viscoelastic substance 14 can minimize fine vibrations, such as sympathetic vibrations, produced in movable member 22 of the objective lens driving apparatus. Since objective lens unit 21 can be positioned in an instant, furthermore, the time for the access to the target information on optical disk D is reduced, thus ensuring high-speed, high-accuracy control.

Fig. 10 shows an objective lens driving apparatus according to a third embodiment of the present invention. In the apparatus of this embodiment, objective lens 41 is guided by means of a slide bearing so that it can be driven in a predetermined direction. Lens 41 is fixed to movable member 42. Member 42 is supported by means of supporting shaft 43 which is set up on base 46 and extends parallel to the optical axis of lens 41. Thus, objective lens 41, along with movable member 42, can both slide in the axial direction of shaft 43 and rotate around shaft 43, that is, it can enjoy a two-dimensional movement. Movable member 42 is fixedly mounted with focusing coil 44 wound around shaft 43 and a pair of tracking coils 45 arranged symmetrically with respect to shaft 43, as well as objective lens 41. Each coil 45 is wound in the form of a rectangular frame around an axis perpendicular to shaft 43. Further, movable member 42 is connected to base 46 by means of elastic suspension 47 so that the motion of member 42 is subject to a restoring force.

The axial movement of movable member 42, in the Y-direction or the focusing direction of objective lens 41, is caused by an electromagnetic force produced between electric current flowing through focusing coil 44, attached to the lower part of member 42, and a focusing magnetic circuit which is formed of permanent magnet 48 and yoke 49 mounted on base 46. The drive of movable member 42 in the X-direction or the tracking direction is caused by a couple of forces attributable to an electromagnetic force produced between electric current flowing through tracking coils 45 and a tracking magnetic circuit which is formed of permanent magnets 50 and yokes 51 mounted on base 46. A vibration system is constructed by all the moving parts and the springiness of suspension 47 for providing a mechanical neutral position in the two-dimensional movement. In this vibration system, however, only suspension 47 has a slight damping effect, which is not very satisfactory. Accordingly, undesired sympathetic vibrations cannot be sufficiently restrained during the operation, so that objective lens 41 cannot be positioned with ease.

For this reason, also in this embodiment, the gaps between focusing coil 44 and permanent magnet 48 and between tracking coils 45 and permanent magnets 50 are each filled up with viscoelastic substance 14 which contains magnetic particles. Thus, fine vibrations, such as sympathetic vibrations, produced in movable member 22 of the objective lens driving apparatus can be minimized. Since objective lens 41 can be positioned in an instant, moreover, the time for the access to the target information on optical disk D is reduced, thus ensuring high-speed, high-accuracy control.

Fig. 11 shows an objective lens driving apparatus according to a fourth embodiment of the present invention. The apparatus of this embodiment is constructed so that movable member 62 is connected to fixed portion 70 by means of four wires 63. This apparatus is driven in the same manner as the objective lens driving apparatuses according to the foregoing three embodiments. More specifically, the apparatus is driven by energizing focusing coil 64 and tracking coils 65 to which magnetic force is applied by means of a magnetic circuit. The magnetic circuit is formed of a pair of inner yokes 67, a pair of outer yokes 68, and permanent magnets 69 fixed individually to yokes 68, the inner and outer yokes protruding from base 66. Unless the straightness of wires 63 and the parallelism between the wires are satisfactory, in the objective lens driving apparatus of this type, undesired vibrations are produced during the drive in the focusing direction (Y-direction) and the tracking direction (X-direction), so that the follow-up performance of objective lens 61 to trace optical disk D is lowered.

In the present embodiment, therefore, the gaps between focusing coil 64 and yokes 67 and between tracking coils 65 and permanent magnets 68 are each filled up with viscoelastic substance 14 which contains magnetic particles. Thus, the aforementioned problems can be solved, and the objective lens driving apparatus can enjoy very high controllability.

The following is a further description of viscoelastic substance 14 which can be used in the various objective lens driving apparatuses described herein. In the above embodiments, the magnetic particles are first dispersed in a viscoelastic material, and the resulting substance is then made to gel, thereby ensuring accurate positioning. Since the magnetic gap length is so short that it is difficult to locate the viscoelastic substance with high viscosity in the magnetic gaps. In positioning the viscoelastic substance, therefore, the magnetic gaps are first filled before the viscosity of the substance becomes very high, and the substance is then allowed to gel. According to the present embodiment, the property of substance that the bridging state of its molecules is changed by heating is utilized. After the heated viscoelastic substance is tentatively located in a desired position, it is heat-set in this position to obtain a desired viscosity. Naturally, the substance may be made to gel by any other methods, depending on the material. The magnetic particles can be dispersed substantially uniformly in the viscoelastic substance when the viscosity of the substance is relatively low.

Although it is advisable to disperse the magnetic particles substantially uniformly, the effect shown in Fig. 4B can be obtained even when magnetic particles 15 are unevenly mixed with viscoelastic substance 14. Further, magnetic particles 15 are not restricted to any predetermined size, and irregular particles may be used with the same result.

If viscoelastic substance 14 used is adhesive, it cannot be slip out of the magnetic gaps even though it is subjected to a tensile, compressive, or shearing force. Thus, a steady vibration damping effect can be expected.

Viscoelastic substance 14 according to the present invention is not limited to the use in an objective lens driving

apparatus. It can constitute a general vibration-proof apparatus if it is disposed between two or more objects which are displaced differently.

Claims

1. A magnetic driving apparatus comprising:

a fixed portion (7,8);
movable portion (2) movable relatively to the fixed portion (7,8);
magnetic field forming means for applying a magnetic field to the movable portion (2) so as to control the movement of the movable portion (2); and
vibration absorbing means arranged between the movable portion and the fixed portion, for absorbing vibration of the movable portion, said absorbing means being a viscoelastic substance (14a,14b,14) arranged in the magnetic field and having magnetic material (15) dispersed in the substance; characterized in that said substance is a gel.

2. An apparatus according to claim 1, characterized in that said movable portion includes a movable member, an objective lens (1) held on the movable member, and a coil mounted on the movable member; and said magnetic field forming means includes a magnetic circuit for applying a magnetic field to the coil and driving the objective lens in a predetermined direction with respect to an optical disk.

3. An apparatus according to claim 2, characterized in that said fixed portion includes a base (8), said movable member is supported by supporting means to be movable in a predetermined direction with respect to the base, said magnetic field forming means is fixed to the base, and said vibration absorbing means is arranged between the coil and the magnetic field forming means.

4. An apparatus according to claim 3, characterized in that said magnetic material (15) of said vibration absorbing means constitutes a magnetic flux path between the coil and the magnetic field forming means.

5. An apparatus according to claim 3, characterized in that said vibration absorbing means is held between the coil and the magnetic attraction of the magnetic field acting on the magnetic material (15).

6. An apparatus according to claim 3, characterized in that said movable member (2,22,42,62) is supported by the supporting means for movement along an optical axis, of the objective lens (1,21,41,61), and said coil includes a first coil (9a,9b,31,44,64) wound around an axis parallel to the optical axis of said objective lens and adapted to drive the movable member along the optical axis.

7. An apparatus according to claim 6, characterized in that said movable member (2,22,42,62) is supported by the supporting means to be rotatable around a central axis parallel to the optical axis, and said coil includes a pair of second coils (10a,10b,28,45,65) arranged symmetrically with respect to the central axis and adapted to cause the movable member to rotate around the central axis.

8. An apparatus according to claim 7, characterized in that said magnetic field forming means includes a first yoke (11a,11b,67) fixed to the base (8,66) and passed through the first coil (9a,9b,65) with a predetermined gap between the first coil and the first yoke, and said viscoelastic substance (14a,14b,14) is arranged between the first coil and the first yoke.

9. An apparatus according to claim 8, characterized in that said magnetic field forming means includes a pair of second yokes (13a,13b,69) fixed individually to the base (8,66) and facing the second coils (10a,10b,65) corresponding thereto, and a pair of magnets (13a,13b,68) fixed individually to the second yokes and facing the second coils with a predetermined gap between each said second coil and each said magnet, and said viscoelastic substance (14a,14b,14) is disposed between each said second coil and each said magnet.

10. An apparatus according to any one of claims 1 to 9, characterized in that said viscoelastic substance (14a,14b,14) is obtained by dispersing the magnetic material (15) in a viscous material to gel.

11. An apparatus according to any one of claims 1 to 9, characterized in that said viscoelastic substance (14a,14b,14)

is a substance whose modulus of elasticity irreversibly changes depending on a temperature change.

12. An apparatus according to any one of claims 1 to 9, characterized in that said viscoelastic substance (14a,14b,14) is electrically nonconductive.
13. An apparatus according to any one of claims 1 to 9, characterized in that said viscoelastic substance (14a, 14b, 14) is adhesive.
14. An apparatus according any one of claims 1 to 9, characterized in that said viscoelastic substance (14a,14b,14) is a gel consisting mainly of silicone.

Patentansprüche

1. Magnetansteuergerät mit:

einem festen Teil (7, 8),

einem beweglichen Teil (2), der bezüglich des festen Teiles (7, 8) beweglich ist,

einer Magnetfeldbildungseinrichtung zum Anlegen eines Magnetfeldes an den beweglichen Teil (2), um die Bewegung des beweglichen Teiles (2) zu steuern, und

einer Schwingungsabsorbierereinrichtung, die zwischen dem beweglichen Teil und dem festen Teil angeordnet ist, zum Absorbieren einer Schwingung des beweglichen Teiles, wobei die Absorbierereinrichtung eine viskoelastische Substanz (14a, 14b, 14) ist, die in dem Magnetfeld angeordnet ist und ein Magnetmaterial (15) hat, das in der Substanz zerstreut oder dispergiert ist, dadurch gekennzeichnet, daß die Substanz ein Gel ist.

2. Gerät nach Anspruch 1, dadurch gekennzeichnet, daß der bewegliche Teil ein bewegliches Glied, eine Objektivlinse (1), die auf dem beweglichen Glied gehalten ist, und eine Spule, die auf dem beweglichen Glied befestigt ist, umfaßt, und daß die Magnetfeldbildungseinrichtung einen Magnetkreis aufweist, um ein Magnetfeld an die Spule zu legen und die Objektivlinse in einer vorbestimmten Richtung bezüglich einer optischen Platte anzusteuern oder anzutreiben.

3. Gerät nach Anspruch 2, dadurch gekennzeichnet, daß der feste Teil eine Unterlage (8) umfaßt, daß der bewegliche Teil durch eine Lagereinrichtung getragen ist, um in einer vorbestimmten Richtung bezüglich der Unterlage beweglich zu sein, daß die Magnetfeldbildungseinrichtung an der Unterlage festgelegt ist, und daß die Schwingungsabsorbierereinrichtung zwischen der Spule und der Magnetfeldbildungseinrichtung angeordnet ist.

4. Gerät nach Anspruch 3, dadurch gekennzeichnet, daß das Magnetmaterial (15) der Schwingungsabsorbierereinrichtung einen Magnetflußpfad zwischen der Spule und der Magnetfeldbildungseinrichtung bildet.

5. Gerät nach Anspruch 3, dadurch gekennzeichnet, daß die Schwingungsabsorbierereinrichtung zwischen der Spule und der Magnetanziehung des Magnetfeldes, das auf das Magnetmaterial (15) wirkt, gehalten ist.

6. Gerät nach Anspruch 3, dadurch gekennzeichnet, daß das bewegliche Glied (2, 22, 42, 62) durch die Lagereinrichtung für eine Bewegung längs einer optischen Achse der Objektivlinse (1, 21, 41, 61) gelagert ist, und daß die Spule eine erste Spule (9a, 9b, 31, 44, 64) umfaßt, die um eine Achse parallel zu der optischen Achse der Objektivlinse gewickelt und gestaltet ist, um das bewegliche Glied längs der optischen Achse anzusteuern oder anzutreiben.

7. Gerät nach Anspruch 6, dadurch gekennzeichnet, daß das bewegliche Glied (2, 22, 42, 62) durch die Lagereinrichtung getragen ist, um drehbar um eine Mittelnachse parallel zu der optischen Achse zu sein, und daß die Spule ein Paar von zweiten Spulen (10a, 10b, 28, 45, 65) umfaßt, die symmetrisch bezüglich der Mittelnachse angeordnet und gestaltet sind, um das bewegliche Glied zu veranlassen, um die Mittelnachse zu rotieren.

8. Gerät nach Anspruch 7, dadurch gekennzeichnet, daß die Magnetfeldbildungseinrichtung ein erstes Joch (11a, 11b, 67) aufweist, das an der Unterlage (8, 66) festgelegt ist und durch die erste Spule (9a, 9b, 65) mit einem vorbestimmten Spalt zwischen der ersten Spule und dem ersten Joch verläuft, und daß die viskoelastische Substanz

(14a, 14b, 14) zwischen der ersten Spule und dem ersten Joch angeordnet ist.

9. Gerät nach Anspruch 8, dadurch gekennzeichnet, daß die Magnetfeldbildungseinrichtung ein Paar von zweiten Jochen (13a, 13b, 69), die einzeln an der Unterlage (8, 66) festgelegt sind und den zweiten Spulen (10a, 10b, 65) entsprechend hierzu gegenüberliegen, und ein Paar von Magneten (13a, 13b, 68), die einzeln an den zweiten Jochen festgelegt sind und den zweiten Spulen mit einem vorbestimmten Spalt zwischen jeder zweiten Spule und jedem Magnet gegenüberliegen, aufweist und daß die viskoelastische Substanz (14a, 14b, 14) zwischen jeder zweiten Spule und jedem Magnet angeordnet ist.
10. Gerät nach einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die viskoelastische Substanz (14a, 14b, 14) durch Dispergieren oder Zerstören des Magnetmaterials (15) in einem Viskosenmaterial zu einem Gel erhalten ist.
11. Gerät nach einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die viskoelastische Substanz (14a, 14b, 14) eine Substanz ist, deren Elastizitätsmodul sich irreversibel abhängig von einer Temperaturänderung verändert.
12. Gerät nach einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die viskoelastische Substanz (14a, 14b, 14) elektrisch nicht leitend ist.
13. Gerät nach einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die viskoelastische Substanz (14a, 14b, 14) ein Haft- oder Klebmittel ist.
14. Gerät nach einem der Ansprüche 1 bis 9, dadurch gekennzeichnet, daß die viskoelastische Substanz (14a, 14b, 14) ein Gel ist, das hauptsächlich aus Silicium bzw. Silicon besteht.

Revendications

1. Dispositif d'entraînement magnétique comprenant:

une partie fixe (7, 8);
une partie mobile (2) pouvant se déplacer par rapport à la partie fixe (7, 8);
un moyen de formation d'un champ magnétique pour appliquer un champ magnétique à la partie mobile (2),
de sorte à commander le mouvement de la partie mobile (2); et
un moyen d'amortissement des vibrations agencé entre la partie mobile le et la partie fixe, pour amortir les vibrations de la partie mobile, ledit moyen d'amortissement étant une substance viscoélastique (14a, 14b, 14), agencée dans le champ magnétique et comportant un matériau magnétique dispersé dans la substance; caractérisé en ce que ladite substance est un gel.

2. Dispositif selon la revendication 1, caractérisé en ce que ladite partie mobile englobe un élément mobile, une lentille d'objectif (1) maintenue sur l'élément mobile, et une bobine montée sur l'élément mobile; et en ce que ledit moyen de formation du champ magnétique englobe un circuit magnétique pour appliquer un champ magnétique à la bobine et entraîner la lentille d'objectif dans une direction prédéterminée par rapport à un disque optique.
3. Dispositif selon la revendication 2, caractérisé en ce que ladite partie fixe englobe une base (8), ledit élément mobile étant supporté par un moyen de support, de sorte à pouvoir être déplacé dans une direction prédéterminée par rapport à la base, ledit moyen de formation du champ magnétique étant fixé à la base et ledit moyen d'amortissement des vibrations étant agencé entre la bobine et le moyen de formation du champ magnétique.
4. Dispositif selon la revendication 3, caractérisé en ce que ledit matériau magnétique (15) dudit moyen d'amortissement des vibrations constitue une voie de flux magnétique entre la bobine et le moyen de formation du champ magnétique.
5. Dispositif selon la revendication 3, caractérisé en ce que ledit moyen d'amortissement des vibrations est maintenu entre la bobine et l'attraction magnétique du champ magnétique agissant sur le matériau magnétique (15).
6. Dispositif selon la revendication 3, caractérisé en ce que ledit élément mobile (2, 22, 42, 62) est supporté par le moyen de support en vue d'un déplacement le long d'un axe optique de la lentille d'objectif (1, 21, 41, 61), et en ce

que ladite bobine englobe une première bobine (9a, 9b, 31, 44, 64) enroulée autour d'un axe parallèle à l'axe optique de ladite lentille d'objectif et destinée à entraîner l'élément mobile le long de l'axe optique.

- 5 7. Dispositif selon la revendication 6, caractérisé en ce que ledit élément mobile (2, 22, 42, 62) est supporté par le moyen de support de sorte à pouvoir tourner autour d'un axe central parallèle à l'axe optique, et en ce que ladite bobine englobe une paire de deuxième bobines (10a, 10b, 28, 45, 65) agencées symétriquement par rapport à l'axe central et destinées à entraîner la rotation de l'élément mobile autour de l'axe central.
- 10 8. Dispositif selon la revendication 7, caractérisé en ce que ledit moyen de formation du champ magnétique englobe une première culasse (11a, 11b, 67) fixée à la base (8, 66) et traversant la première bobine (9a, 9b, 65), un espace prédéterminé étant ménagé entre la première bobine et la première culasse, ladite substance viscoélastique (14a, 14b, 14) étant agencée entre la première bobine et la première culasse.
- 15 9. Dispositif selon la revendication 8, caractérisé en ce que ledit moyen de formation du champ magnétique englobe une paire de deuxième culasses (13a, 13b, 69) fixées individuellement à la base (8, 66) et faisant face aux deuxième bobines (10a, 10b, 65) qui y correspondent, une paire d'aimants (13a, 13b, 68) fixés individuellement aux deuxième culasses et faisant face aux deuxième bobines, un espace prédéterminé étant ménagé entre chacune desdites deuxième bobines et chacun desdits aimants, ladite substance viscoélastique (14a, 14b, 14) étant agencée entre chacune desdites deuxième bobines et chacun desdits aimants.
- 20 10. Dispositif selon l'une quelconque des revendications 1 à 9, caractérisé en ce que ladite substance viscoélastique (14a, 14b, 14) est produite par dispersion du matériau magnétique (15) dans un matériau visqueux pour former un gel.
- 25 11. Dispositif selon l'une quelconque des revendications 1 à 9, caractérisé en ce que ladite substance viscoélastique (14a, 14b, 14) est une substance dont le module d'élasticité change irréversiblement en fonction d'un changement de température.
- 30 12. Dispositif selon l'une quelconque des revendications 1 à 9, caractérisé en ce que ladite substance viscoélastique (14a, 14b, 14) n'est pas électroconductrice.
13. Dispositif selon l'une quelconque des revendications 1 à 9, caractérisé en ce que ladite substance viscoélastique (14a, 14b, 14) est adhésive.
- 35 14. Dispositif selon l'une quelconque des revendications 1 à 9, caractérisé en ce que ladite substance viscoélastique (14a, 14b, 14) est un gel composé essentiellement de silicone.

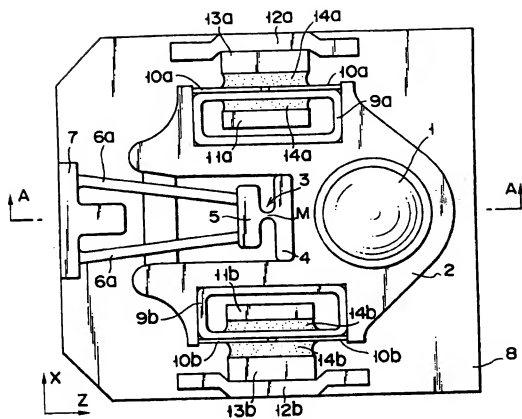


FIG. 1

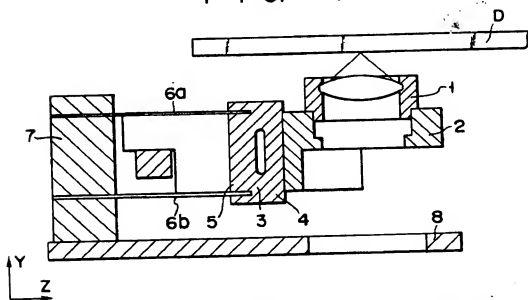


FIG. 2

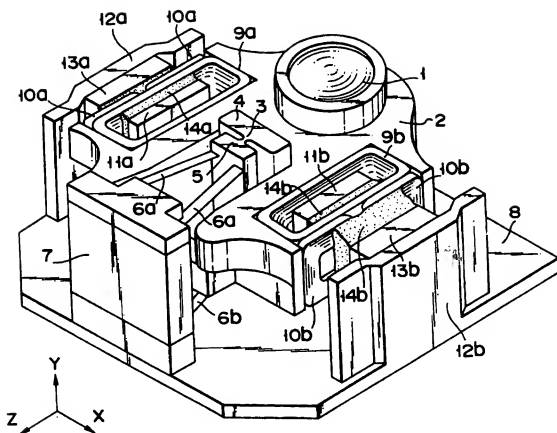


FIG. 3




FIG. 4A

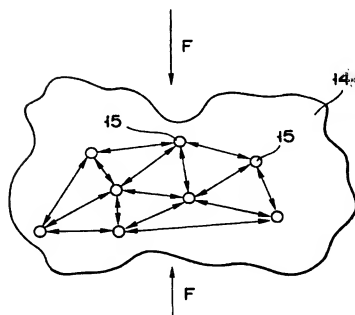


FIG. 4B

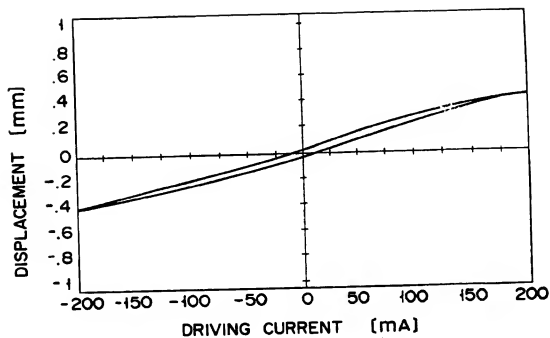


FIG. 5A

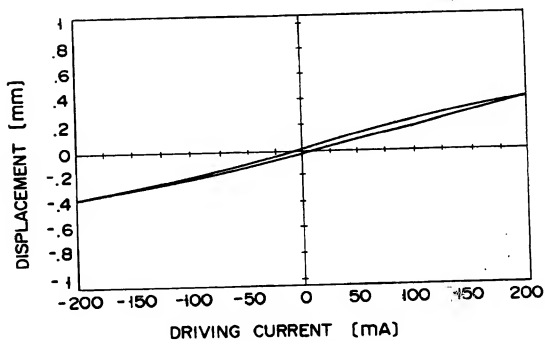


FIG. 5B

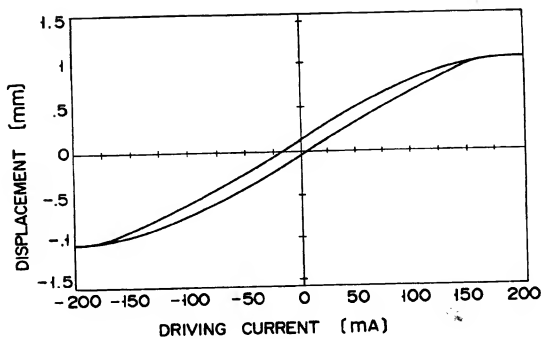


FIG. 6A

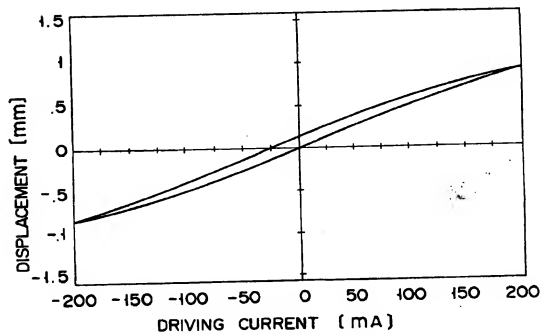
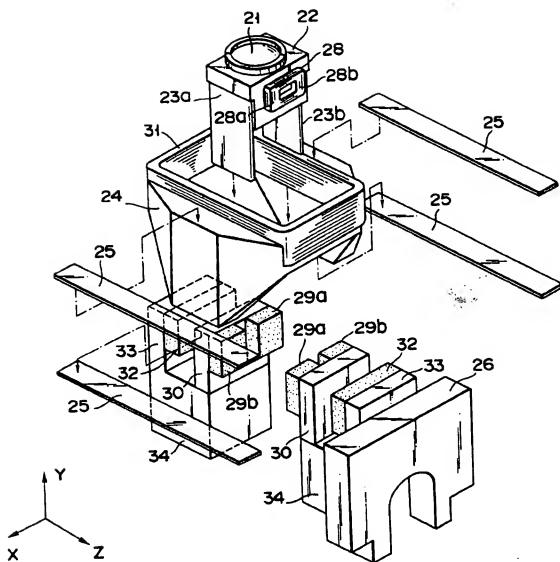


FIG. 6B



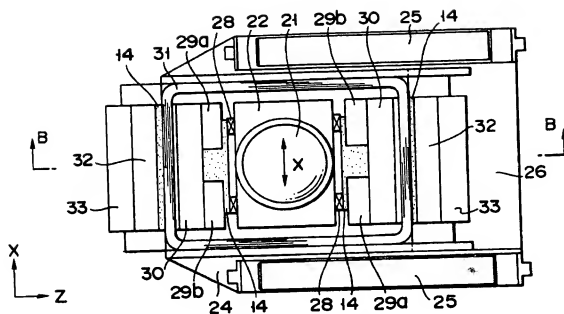


FIG. 8

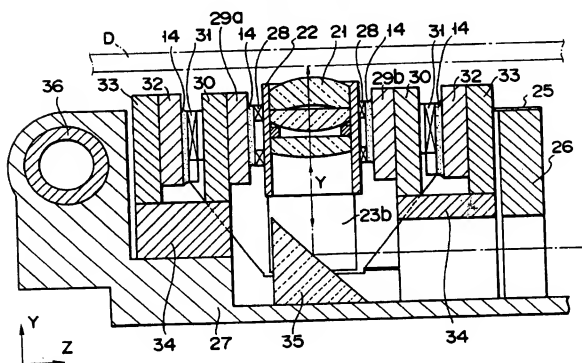
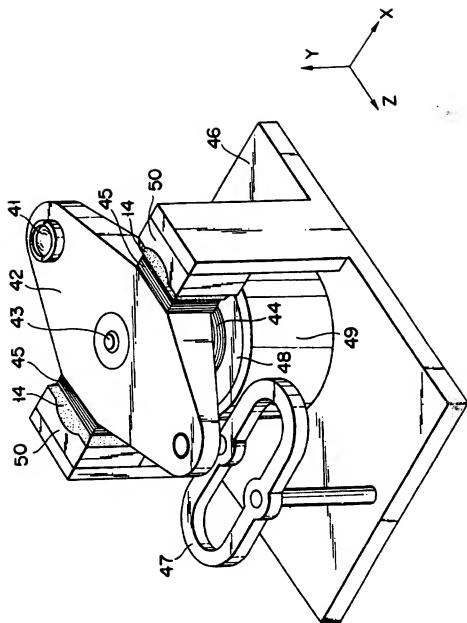


FIG. 9



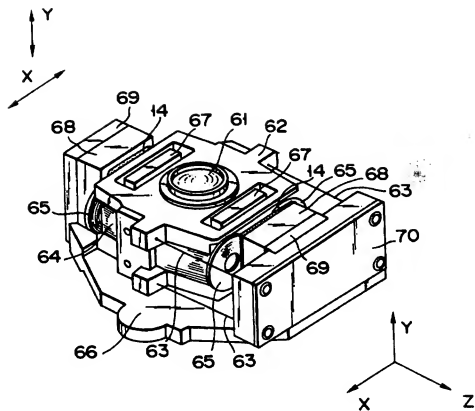


FIG. 11